



Connection Zindagi Ka

*Leading the way to a
Lead free environment*



**Flame Retardant
Lead Free**

‘ROHS Compliant’

FR- Lead free
PVC Insulated Industrial Cables
(Multi Strand) 1100 Volts



- High Current Carrying Capacity • Energy Saving • Higher Flexibility
- High Fire Retardancy • Glossy & Smooth Surface Finish • Low Emission of Toxic Gases • Computerized Cable Design • Free from hazardous substances



Company Profile

Polycab an ISO 9001:2008, ISO 14001:2004, OHSAS 18001:2007 company is India's no.1 cables & wires company with a glorious track record of over 4 decades. our manufacturing facilities at Halol (Vadodara), Daman, Nashik and Roorkee in India, addresses to the specific needs with state-of-the-art machinery and technology.

Polycab's turnover has crossed INR 6000 crore's in the fiscal year 2016-17. Polycab derives its strength from its customer and those being in sectors like utilities, power generation, transmission & distribution, petroleum & oil refineries, OEMS, EPC contractors, steel & metal, cement, chemical, atomic energy, nuclear plants as well as Government partners like BSNL, Railways and Private Telecom operators like Reliance, Vodafone, Airtel, Aircel, TATA, Idea and many more.

Polycab offers a variety of services:

- *Commercially reasonable prices*
- *Reliable & consistent quality*
- *Product development as per market*
- *A target stocking policy*
- *Technical support for application*


THINGS YOU DIDN'T KNOW ABOUT POLYCAB

Between its facilities in Daman, Halol (Vadodara), Nashik and Roorkee the company has 3.5 million square feet of manufacturing space.

Polycab manufactures enough cables each year to circumnavigate the earth three and a half times and enough wire to go to the moon and come back- four times.

Polycab has increased its turnover 100 times in sixteen years.

Over 300 Authorised distributors service its India needs and its overseas interests.

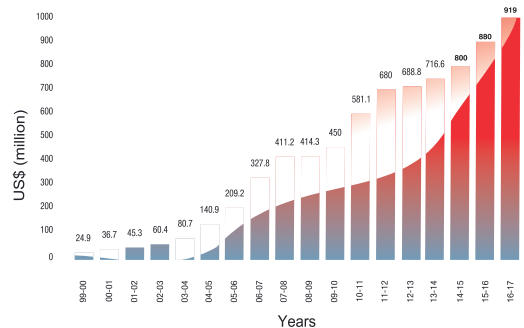



Chairman's Message

The journey of over four decades would not have been as exciting and fulfilling without the unconditional support of all our customers & our sales partners, I would like to express our deep gratitude to you, as you have made Polycab one of the outstanding companies in our industry.

Despite our rapid growth and elevation to the leadership position in the industry, the simplicity in Polycab's flexibility and openness to new market trends and changing technology continue to be our driving force. The core values of, simplicity, team work, trust amongst people, customer focus and meeting commitments have given us a unique position and respectability among the Indian industry.

Gearing up for the future and to keep winning in tomorrow's world, we have a well recognized market presence with a strong product & portfolio, streamlined and efficient manufacturing capabilities to withstand the winds of change. But we will need to be even more proactive, agile and customer centric. We will need to anticipate the future and be ready with solutions, even before the customer asks for them.

There are many new challenges the cable industry is facing with new market opportunities and product developments. Automation in all sphere's of business processing is becoming very important and innovation in this segment is inevitable. Polycab is extending its product range in the segment to meet your growing needs and many new products for specific applications will be introduced soon.

Polycab's business model is evolving. We are enhancing our key internal operations to ensure a consistent and positive experience for our customers. Our business processes will begin and end with the customers. We have identified focus areas of growth over the next 5 years and beyond. Polycab aspires to be a RS.10000+ crore company within the next 4 years.

We take this opportunity to thank you and convey our gratitude for the unabated support and trust you have always reposed on Polycab and encouraged it to move ahead confidently. We are confident that this will keep us ahead in our constant endeavour to be your preferred brand.

We hope to improve each day to serve you better.

HAPPY CABLING!!!

INDER T. JAISINGHANI
Chairman & Managing Director



POLYCAB FIRE RETARDANT BUILDING WIRES

POLYCAB, a leading Indian Wire & cable manufacturer established its brand name in wire & cables 40 years before and continuing its service to the Indian & Global market with a major volume as well as quality.

Wires & Cables are the 'pipeline' for the flow of current, data and signal information which form the backbone in a manufacturing environment as well as our day to day life. Therefore not only should these Wires & Cables be produced in an organized and controlled environment but also adhere to best practices, international standards of quality, environmental safety standards, technical performance and product consistency. The quality standard has improved tremendously as several foreign players have already entered in the market and POLYCAB wires & cables are at par with all branded products.

To carry forward the brand name POLYCAB is always looking for a highest quality raw materials as well as state-of-the production process and engineering. If a buyer gets a cable from unbranded supplier who uses impure copper for which he has to pay a higher prices as the resistance for one meter wire will be very high, and secondly impure copper means more losses in transmission or inflated electrical bill at home. We can save up to 20% of electricity in transmission if pure copper and highly insulated PVC cables are used.

POLYCAB is an organization who believes in customer's growth and success and would like to serve for long time. Despite the increase of material prices POLYCAB always absorbs the additional cost and keeps the profit razor like thin and maintaining the quality unchanged.

POLYCAB has the broadest range of solutions for a great variety of commercial, industrial, hospital, hotel and residential applications in electrical, lighting, building and constructions.

POLYCAB is the total solution provider in ever changing global marketplace. POLYCAB will provide with years of quality performance and satisfaction. Whether you are considering purchasing for the first time or have been with us for years, our commitment to your success is unwavering.



POLYCAB - FR - LF 10 SQ MM 1100V IS : 694  CM/L - 2832257 CE


SINGLE CORE CABLES

APPLICATION

Polycab Single core FR-LF wire is Eco & environment friendly to the environment & suitable for use where high flexibility is of Prime importance. This is also suitable for indoor and outdoor installation in industries, household appliances, power supply for refrigerators, air conditioners and building electrification.

CABLE DESIGNATION / TYPE

FR-LF

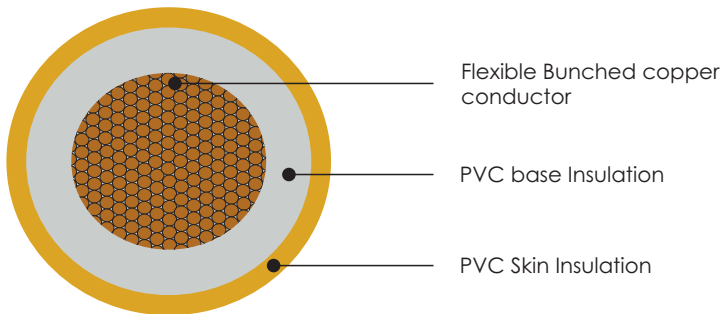

PRODUCT FEATURE

- Flame Retardant
- Smooth & glossy surface with enhanced lubrication properties
- High Insulation Resistance
- High abrasion Resistance
- ROHS Compliant

DESIGN

- Plain annealed bunched circular copper conductor
- Insulation: Flexible PVC compound


CORE IDENTIFICATION

- Red, Yellow, Blue, Black, Green
(Customized colour can be provided)

APPLICABLE STANDARD

- IS 694 : 2010
- IEC 60332 - 1 : 2004
- ASTM 2863 : ASTM D2803-17a

APPROVALS

- IS 8130 : 2013 BIS 
- CE


CABLE CHARACTERISTICS

- Nominal Voltage (U0/U) : 600/1100 V
- Max Operating Temperature : 70°C
- Temperature Range : -15°C to + 70°C
- Flame Resistant : ASTM D2863
- Flammability : IEC 60332 - 1:2004
- Minimum Bending Radius : 8D

FR-LF

Nominal Area of Conductor SQ.mm.	Max Diameter of each strand	Thickness of Insulation (Nom.) mm.	Approx. Overall Diameter mm.	Current Carrying Capacity* Rating Amps.	Resistance (Max.) per Km. @20°C Ohms
0.75	24/0.21	0.6	2.5	7	26
1	14/0.31	0.7	2.8	12	18.1
1.5	22/0.30	0.7	3.1	16	12.1
2.5	36/0.30	0.8	3.8	22	7.41
4	56/0.30	0.8	4.4	29	4.95
6	84/0.30	0.8	5.2	37	3.3
10	80/0.41	1.0	5.8	51	1.91
16	126/0.40	1.0	6.8	68	1.21



POLYCAB - FR - LF - LSH 10 SQ MM 1100V IS : 694  CM/L - 2832257 CE


SINGLE CORE CABLES

APPLICATION

Polycab Single core FR-LSH unsheathed insulated wire is suitable for residential wiring, either through embedded conduit or on the surface of the wall. The wire has enhanced flame resistant properties and low smoke generation hence it is suitable for use in all high rise buildings, malls and Hospitals.

CABLE DESIGNATION / TYPE

FR-LF-LSH

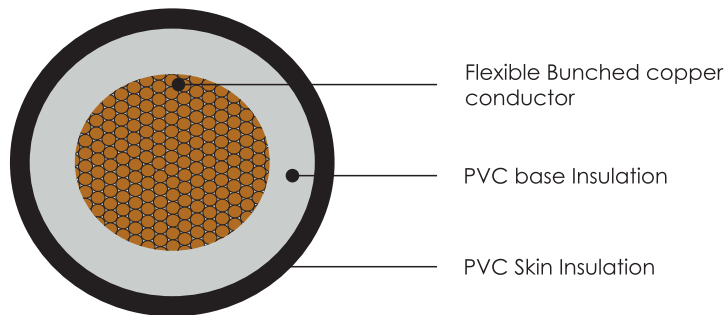

PRODUCT FEATURE

- Flame Retardant
- Low Smoke
- Smooth & glossy surface with enhanced lubrication properties
- High Insulation Resistance
- High abrasion Resistance
- ROHS Compliant

DESIGN

- Plain annealed bunched circular copper conductor
- Insulation: Flexible PVC compound


CORE IDENTIFICATION

- Red, Yellow, Blue, Black, Green
(Customized colour can be provided)

APPLICABLE STANDARD

- IS 694 : 2010
- IEC 60332 -1 : 2004
- ASTM D2863
- ASTM D2843-16
- IEC 60754 -1 : 2011

APPROVALS

- IS 8130 : 2013 
- CE


CABLE CHARACTERISTICS

- Nominal Voltage (U0/U) : 600/1100 V
- Max Operating Temperature : 70°C
- Temperature Range : -15°C to + 70°C
- Oxygen Index : >29%
- Smoke Density Rating : Max 60%
- Acid Gas Generation : Max 20%
- Flammability : IEC 60332 - 1
- Minimum Bending Radius : 8D

FR-LSH

Nominal Area of Conductor SQ.mm.	Max Diameter of each strand	Thickness of Insulation (Nom.) mm.	Approx. Overall Diameter mm.	Current Carrying Capacity* Rating Amps.	Resistance (Max.) per Km. @20°C Ohms
0.75	24/0.20	0.6	2.5	7	26
1	14/0.30	0.7	2.8	12	18.1
1.5	22/0.30	0.7	3.1	16	12.1
2.5	36/0.30	0.8	3.8	22	7.41
4	56/0.30	0.8	4.4	29	4.95
6	84/0.30	0.8	5.2	37	3.3
10	80/0.40	1.0	5.8	51	1.91
16	126/0.40	1.0	6.8	68	1.21



POLYCAB - HR - FR - LF 10 SQ MM 1100V IS : 694  CM/L - 2832257 CE


SINGLE CORE CABLES

APPLICATION

Polycab Single core HR-FR-LF unsheathed wire is suitable for power supply in places where extra fire safety and heat Resistance is required like in high rise buildings, malls, hospitals & subways. This can be used either through embedded conduit or on the surface of the wall.

CABLE DESIGNATION / TYPE

HR-FR-LF

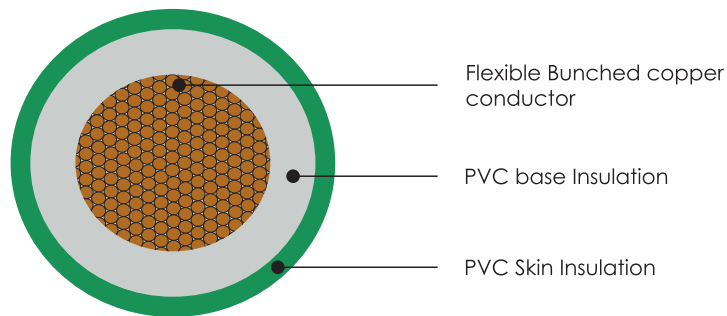

PRODUCT FEATURE

- Flame Retardant
- Smooth & glossy surface With enhanced lubrication properties
- High Insulation Resistance
- High abrasion Resistance
- Rohs Complaint

DESIGN

- Plain annealed bunched circular copper conductor
- Insulation: Flexible PVC compound


CORE IDENTIFICATION

- Red, Yellow, Blue, Black, Green
(Customized colour can be provided)

APPLICABLE STANDARD

- IS 694 : 2010
- IEC 60332 -1 : 2004
- ASTM D2863 : 17a

APPROVALS

- IS 8130 :2013 
- CE

CABLE CHARACTERISTICS

- Nominal Voltage (U0/U) : 600/1100 V
- Max Operating Temperature : 85°C
- Temperature Range : -15°C to + 85°C
- Flame Resistant : ASTM 2863
- Flammability : IEC 60332 - 1
- Minimum Bending Radius : 8D

HR-FR-LF

Nominal Area of Conductor SQ.mm.	Max Diameter of each strand	Thickness of Insulation (Nom.) mm.	Approx. Overall Diameter mm.	Current Carrying Capacity* Rating Amps.	Resistance (Max.) per Km. @20°C Ohms
0.75	24/0.20	0.6	2.5	8.4	26
1	14/0.30	0.7	2.8	14.4	18.1
1.5	22/0.30	0.7	3.1	19.2	12.1
2.5	36/0.30	0.8	3.8	26.4	7.41
4	56/0.30	0.8	4.4	34.8	4.95
6	84/0.30	0.8	5.2	44.4	3.3
10	80/0.40	1.0	5.8	61.2	1.91
16	126/0.40	1.0	6.8	81.6	1.21

Let's go *green* 



Connection Zindagi Ka

Corporate Office:

POLYCAB INDIA LIMITED (formerly known as 'Polycab Wires Limited')

Polycab House, 771, Mogul Lane, Mahim (W), Mumbai - 400 016, Maharashtra (India)

Ph.: +91-22-2432 7070/4, 6735 1400, Email: enquiry@polycab.com,

Toll Free No.: 1800 267 0008, www.polycab.com