



Make the right connections

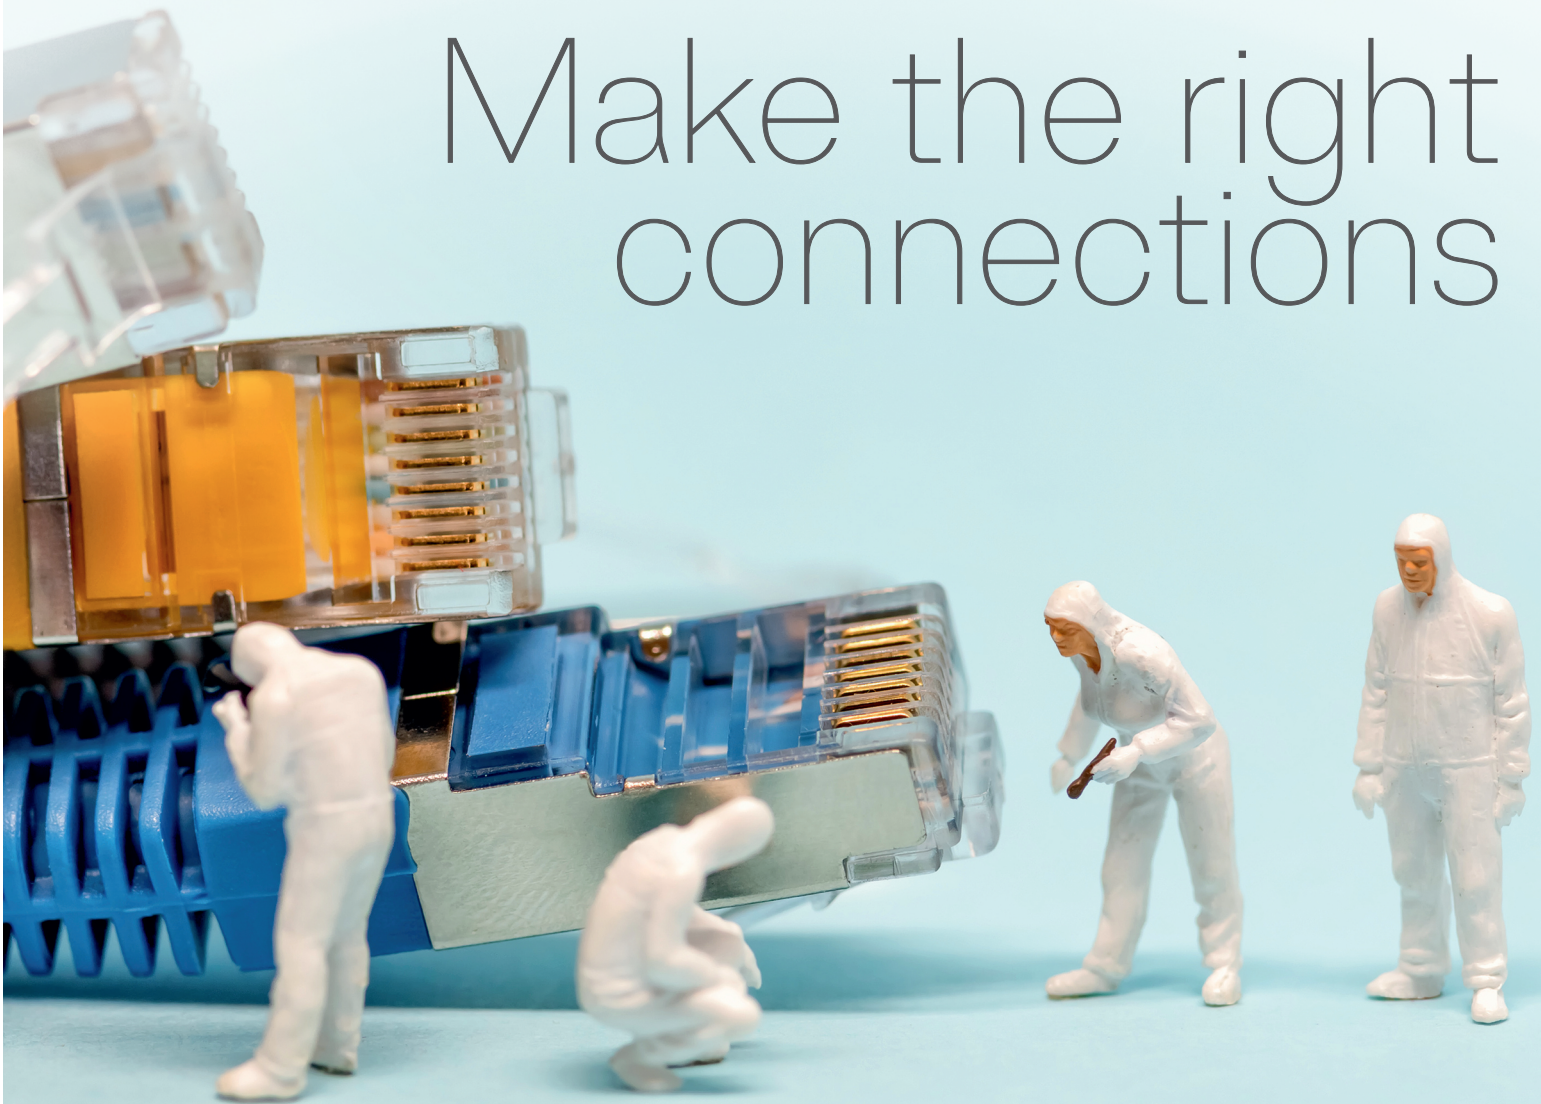

POLYCAB

POLYCAB

POLYCAB



LAN CABLES

UTP 4 PAIR CAT 5 / 5e

ISO
9001:2008

UTP Cat 5e & Cat 6 Lan Cables

POLYCAB brings to you LAN Cables best suited to your specific Applications. These are certified by the world renowned Under Writers Laboratories Inc. USA (UL). The Cables are verified to the performance category - 5 / 5e requirements of TIA/EIA 568 - A & UL 444 for Transmission performance.

Polycab Lan cables are suitable for voice, Data, Video and Low Voltage Control, It is suitable for all Lan topologies including Horizontal and Vertical distribution Plenum and Riser.

The conductor is made of Electrolytic plain annealed solid copper of size 0.5 mm., High quality Polyethylene Insulated with suitable colour code, twisted pair, Unshielded light grey PVC Jacketed with improved fire characteristic meeting requirements of IEC - 332 - high oxygen and temperature index.



The UL ISO - 9002 certification ensures the quality of cables and its intended performance.

Salient Features

- Low attenuation and crosstalk
- Low Structural return Loss
- UL verified cables

Construction of cables

- 1 PVC Jacket
- 2 Rip Cord
- 3 PE Insulation
- 4 Bare Copper Conductor

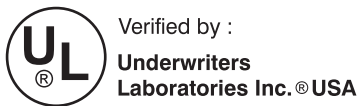

Technical Data - physical	
• Conductor	- Solid Bare Copper
• Nom Dia. of Cond.	- 0.5 mm.
• Insulation	- Special grade PE
• Colour Code	
Pair - 1	White - Blue
Pair - 2	White - Orange
Pair - 3	White - Green
Pair - 4	White - Brown
• Outer Jacket	- FR PVC
Nom Overall Die	- 5.4 mm.
• Jacket Colour	- Grey
• Packaging	- Reflex Box 1000 ft. (305 M)

Technical Data - Electrical				
Frequency MHz	Attenuation dB 100 M (MAX)	Next Worst Pair dB (MIN)		Structural Return Loss (SRL) dB MIN
		CAT-5	CAT-5e	
0.772	1.8	64	64	N. A.
1.00	2.0	62	62.3	23
4.00	4.1	53	53.3	23
8.00	5.8	48	48.8	23
10.00	6.5	47	47.3	23
16.00	8.2	44	44.3	23
20.00	9.3	42	42.8	23
25.00	10.4	41	41.3	22
31.25	11.7	39	39.9	21
62.50	17.0	35	35.4	18
100.00	22.0	32	32.3	16

Parametric Characteristics	
DC Resistance @ 20°C (Max)	9.38 Ω / 100 M
Capacitance Unbalance Pair to Ground (Max)	330 pF / 100 M
Mutual Capacitance (Max)	5.60 nF / 100 M
Characteristics Impedance	100 ± 15 Ω
Nominal Velocity of Propagation	66%
Delay Skew (Max)	45 ns
Propagation Delay @ 20°C, 100 MHz	538 ns / 100 M



Corporate Office:

POLYCAB INDIA LIMITED (formerly known as 'Polycab Wires Limited')

Polycab House, 771, Mogul Lane, Mahim (W), Mumbai - 400 016, Maharashtra (India)

Ph.: +91-22-2432 7070/4, 6735 1400, Email: enquiry@polycab.com, Toll Free No.: 1800 267 0008, www.polycab.com